



### AXIAL METALLIZED POLYESTER FILM CAPACITOR

#### FEATURES:

- Non-Inductive structure, down-leads axially and horizontally.
- Wide capacitance range, small size.
- Long life due to self-healing effect.
- Suitable for block, by-pass and coupling of DC and signals to VHF range.
- Widely used in filter, noise suppression and low pulse circuits.

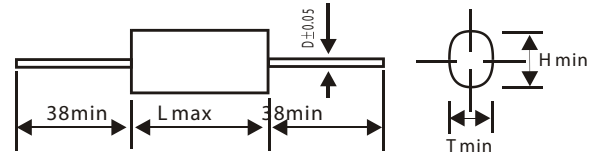

MEA

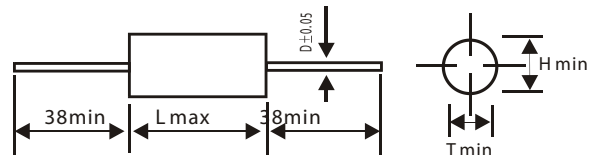

MET

#### CONFIGURATION:

Non-Inductive, wound with metallized polyester film as dielectric and electrode, copper-clad steel leads or flexible cord, and outer wrapped with polyester and sealed with epoxy resin.

#### SPECIFICATIONS:

Operating Temperature	-40°C to +85°C	
Climatic Category	40/85/21	
Rated Voltage	100/160V, 250V, 400V, 630V, 1000V	
Capacitance Range	0.0010 ~ 10μF	
Capacitance Tolerance	±5% (J), ±10% (K), ±20% (M)	
Voltage Proof	1.6UR(5s)	
Dissipation Factor	≤1.0% (20°C, 1KHz)	
Insulation Resistance	≥7500MΩ (CR ≤ 0.33μF) ≥2500s (CR > 0.33μF)	(20°C, 1 min)

#### DIMENSIONS:

CODE	Cap. μF	100/160VDC		250VDC		400VDC		630VDC		1000VDC	
		T Max	L Max	T Max	L Max	T Max	L Max	T Max	L Max	T Max	L Max
102	0.0010	5.0	13.0	5.0	13.0	5.0	13.0	5.0	13.0	6.5	16.5
152	0.0015	5.0	13.0	5.0	13.0	5.0	13.0	5.0	13.0	6.5	16.5
222	0.0022	5.0	13.0	5.0	13.0	5.0	13.0	5.5	13.0	6.5	16.5
332	0.0033	5.0	13.0	5.0	13.0	5.0	13.0	5.0	13.0	6.5	16.5
472	0.0047	5.0	13.0	5.0	13.0	5.0	13.0	5.5	13.0	8.0	16.5
682	0.0068	5.0	13.0	5.0	13.0	5.0	13.0	6.0	13.0	9.5	16.5
103	0.010	5.0	13.0	5.0	13.0	5.0	13.0	6.0	16.5	7.5	20.5
153	0.015	5.0	13.0	5.0	13.0	5.0	13.0	6.5	16.5	8.5	20.5
223	0.022	5.0	13.0	5.5	13.0	5.5	16.5	7.0	16.5	9.5	20.5
333	0.033	5.0	13.0	5.5	13.0	5.5	16.5	6.5	20.5	8.5	28.0
473	0.047	5.0	13.0	5.5	13.0	6.0	16.5	7.5	20.5	9.5	28.0
683	0.068	5.0	13.0	5.5	16.5	6.5	16.5	8.5	20.5	11.0	28.0
104	0.10	5.5	13.0	6.0	16.5	6.5	20.5	8.0	28.0	13.0	33.0
154	0.15	6.0	16.5	6.5	16.5	6.5	20.5	9.0	28.0	14.0	33.0
224	0.22	6.5	16.5	7.0	16.5	7.0	20.5	11.0	28.0	16.0	33.0
334	0.33	7.5	16.5	7.0	20.5	9.0	28.0	11.5	33.0	19.0	33.0
474	0.47	8.5	16.5	8.5	20.5	10.0	28.0	13.5	33.0	22.0	33.0
684	0.68	8.5	20.5	9.0	28.0	11.0	33.0	15.5	33.0		

Please contact us for special case or items not listed.



# MEA / MET Series

## AXIAL METALLIZED POLYESTER FILM CAPACITOR

CODE	Cap. µF	100/160VDC		250VDC		400VDC		630VDC		1000VDC	
		T Max	L Max	T Max	L Max	T Max	L Max	T Max	L Max	T Max	L Max
105	1.0	10.0	20.5	9.5	28.0	13.0	33.0	19.0	33.0		
155	1.5	10.0	28.0	11.0	28.0	14.5	33.0	21.0	33.0		
225	2.2	11.5	28.0	13.0	33.0	17.5	33.0	25.0	33.0		
335	3.3	13.5	28.0	14.0	33.0	20.5	33.0				
475	4.7	15.0	33.0	16.5	33.0	24.0	33.0				
685	6.8	17.5	33.0	19.5	33.0						
106	10	20.5	33.0	22.0	33.0						

Please contact us for special case or items not listed.